




# A14

## Ordering Information

1. Series	A14	1C	C	Q	12VDC
A14					
2. Contact Arrangement					
1A = SPST N.O.					
1C = SPDT					
3. Sealing Option					
C = Dust Cover					
4. Termination Options					
Q = Quick Connect					
5. Coil Voltage					
12VDC					
24VDC					
6. Coil Suppression					
Blank = 680Ω for 12VDC; 2700Ω for 24VDC					
D = Diode (1N4005)					
**Consult factory if other values are needed					

## Dimensions


Units = mm

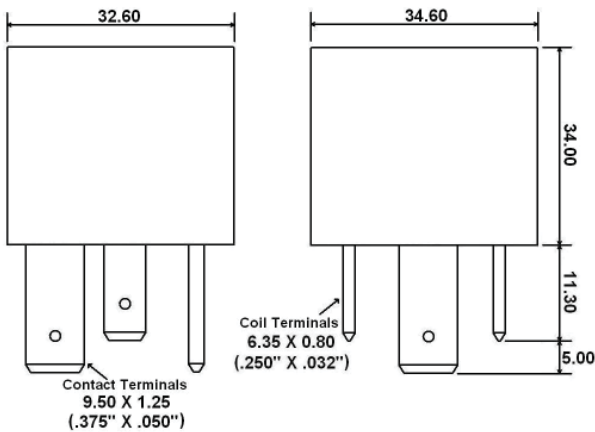


\*\* We recommend the PR Series socket from Custom Connector Corporation

## Schematics


Bottom Views



1A



1C



Dimensions shown in mm. Dimensions are shown for reference purposes only.

Specifications and availability subject to change without notice.