

## Specifications

Electrical Ratings	100mA @ 30VDC	Dielectric Strength	1000Vrms min
Electrical Life	100,000 cycles typical	Insulation Resistance	>100MΩ min
Contact Resistance	<50mΩ initial	Operating Temperature	-40°C to 85°C
Actuation Force	260 ± 30gF	Storage Temperature	-40°C to 85°C
Actuator Travel	1.0mm to lock 1.7mm to full travel		


## Materials

Actuator	Acetal
Housing	PBT
Cover	PBT
Latching Pin	Stainless Steel
Spring	Stainless Steel
Contacts	Phosphor Bronze, Silver Plated
Terminals	Brass, Silver Plated

## Ordering Information

1. Series	LP2284	F260	N
LP2284			
2. Actuation Force	F260 = F260gF		
3. Latching	N = Non-latching		
	* Contact Factory for Latching Option		

## Dimensions

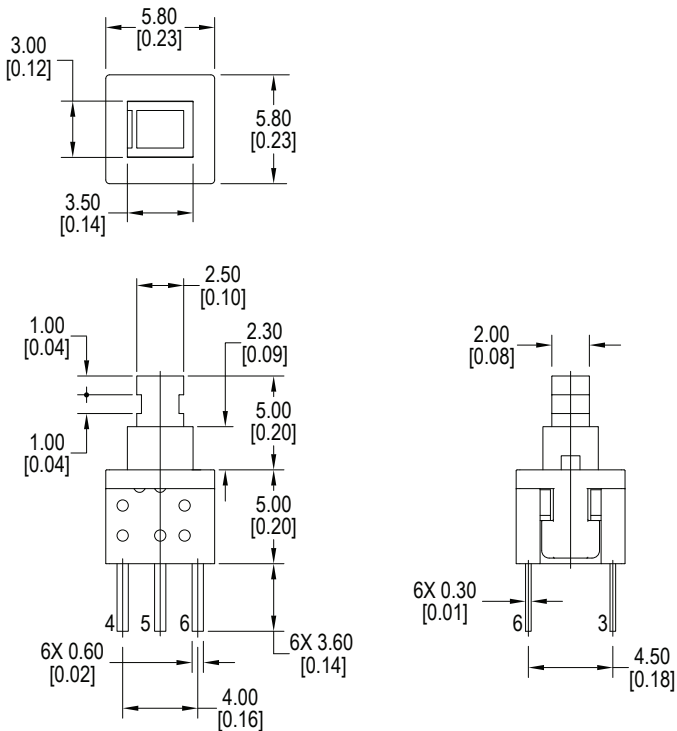

## Schematic & PC Layout

