



Features

- Low power consumption .12W
- Ultra light weight
- Narrow width for high density mounting
- UL/CUL certified

Contact Data

Contact Arrangement	1A = SPST N.O.
Contact Rating	5A @ 250VAC Resistive, 70°C, 20,000 Cycles 5A @ 30VDC Resistive, 70°C, 20,000 Cycles

Contact Resistance	< 50 milliohms initial
Contact Material	AgNi + Au
Maximum Switching Power	150W, 1250VA
Maximum Switching Voltage	250VAC, 110VDC
Maximum Switching Current	5A

Coil Data

Coil Voltage VDC		Coil Resistance Ω +/- 10%	Pick Up Voltage VDC (max) 75% of rated voltage	Release Voltage VDC (min) 10% of rated voltage	Coil Power W	Operate Time ms	Release Time ms
Rated	Max						
5	6.5	208	3.75	.5	.12	10	5
12	15.6	1200	9.00	1.2			
24	31.2	3200	18.00	2.4			

General Data

Electrical Life @ rated load	100K cycles, typical
Mechanical Life	10M cycles, typical
Insulation Resistance	100M Ω min. @ 500VDC
Dielectric Strength, Coil to Contact	2000V rms min. @ sea level
Contact to Contact	1000V rms min. @ sea level
Shock Resistance	100m/s ² for 11 ms
Vibration Resistance	1.50mm double amplitude 10~40Hz
Terminal (Copper Alloy) Strength	5N
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +155°C
Solderability	260°C for 5 s
Weight	3g

Caution
1. The use of any coil voltage less than the rated coil voltage may compromise the operation of the relay.


J112

Ordering Information

1. Series	J112	1A	S	12VDC
J112				
2. Contact Arrangement	1A = SPST N.O.			
3. Sealing Option	S = Sealed			
4. Contact Voltage	5VDC 12VDC 24VDC			

Dimensions

Units = mm

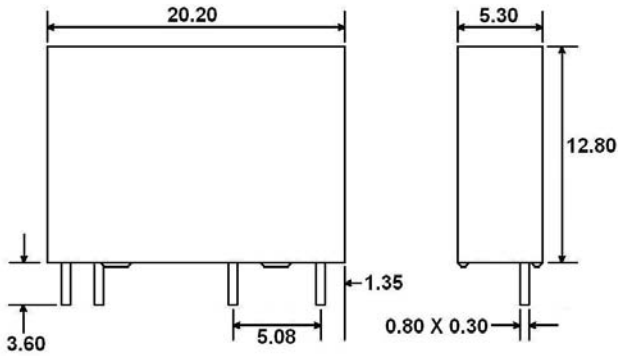

Schematics & PC Layouts

Bottom Views

