



RoHS Compliant

.100" Pitch, Surface Mount DIP

Specifications

Electrical Ratings	switch : 25mA @ 24VDC carry : 100mA @ 24VDC	Dielectric Strength	500Vrms min
Electrical Life	2,000 cycles typical	Insulation Resistance	>100MΩ min
Contact Resistance	<25mΩ initial	Operating Temperature	-40°C to 85°C
Actuation Force	600gF maximum	Storage Temperature	-40°C to 85°C
Actuator Travel	0.90mm		

Materials

Cap	6T Nylon, UL94V-0, white
Cover	6T Nylon, UL94V-0, black
Housing	6T Nylon, UL94V-0, black
Contacts	Beryllium Copper, Gold over Nickel Plated
Terminals	Brass, Gold over Nickel Plated

Ordering Information

1. Series	KJ	04	R	T	H
KJ					
2. Number of Positions	02 = 2 positions 03 = 3 positions 04 = 4 positions 05 = 5 positions 06 = 6 positions 07 = 7 positions 08 = 8 positions 09 = 9 positions 10 = 10 positions 12 = 12 positions				
3. Actuator Height	E = Extended R = Recessed				
4. Tape Seal	X = No Tape Seal T = Tape Seal **Not available with extended actuator				
5. Packaging Options	T = Tube R = Tape & Reel				


Specifications and availability subject to change without notice.

Dimensions shown in mm. Dimensions are shown for reference purposes only.

KJ



.100" Pitch Surface Mount DIP

Dimensions


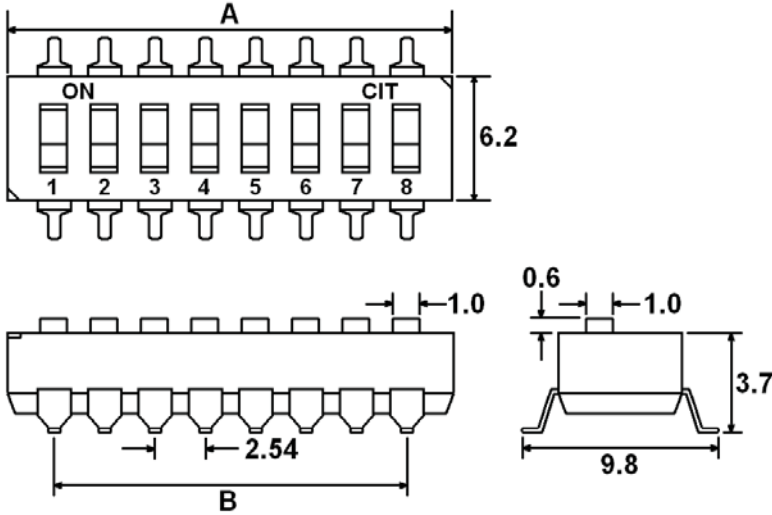


Number of Positions	"A" mm	"B" mm
02	6.02	2.54
03	8.56	5.08
04	11.10	7.62
05	13.64	10.16
06	16.18	12.70
07	18.72	15.24
08	21.26	17.78
09	23.80	20.32
10	26.34	22.86
12	31.42	27.94

Schematic & PC Layout

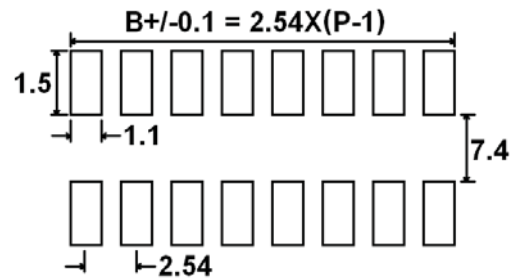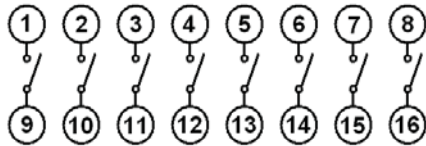

Actuator Options



Packaging Specifications

- All switches packaged in OFF position