


40 Amp Power Relay with AC Coils & Low Case Profile QC Terminals

PTRA

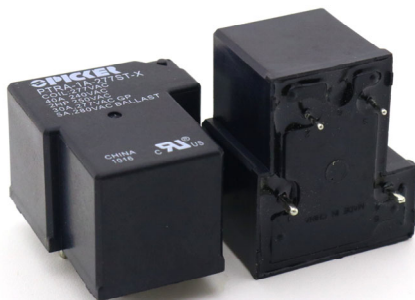

FEATURES

- Power PCB Relay with AC Coils
- 40 Amp 240 VAC Resistive UL Rating
- 2 HP 250 VAC Rating
- UL Class F Insulation Standard
- Meets UL 508 and UL 873 Spacing
- RoHS Compliant

UL / CUL Ratings

cULus E93379

Load Type	Voltage	Cycles	1 Form A (SPST-NO)	1 Form B (SPDT-NC)	1 Form C (SPDT)	
					NO	NC
General Purpose	240 VAC	6,000	30 A	20 A	30 A	20 A
	277 VAC	6,000	30 A	20 A	30 A	20 A
	280 VAC	6,000	5 A	5 A	5 A	5 A
Resistive	240 VAC	250,000	40 A	30 A	40 A	30 A
	240 VAC		20 A	—	20 A	—
	277 VAC	100,000	25 A	—	25 A	—
	30 VDC		40 A	30 A	40 A	30 A
Motor	250 VAC	30,000	2 HP	1.5 HP	2 HP	1.5 HP
	120 VAC	30,000	1 HP	—	1 HP	—
Ballast	280 VAC	6,000	5 A	5 A	5 A	5A

CONTACT DATA

Material		AgCdO, AgSnO ₂ In ₂ O ₃
Initial Contact Resistance		30 mΩ Max. @ 1 A, 6 VDC
Maximum Switching Voltage		110 VDC, 300 VAC
Maximum Switching Current		40 A
Maximum Switching Power		1,200 W, 10,000 VA
Service Life	Mechanical	1 x 10 ⁷ Operations
	Electrical	1 x 10 ⁵ Operations

*6 pin version meets UL 508

5 pin (-1) version meets UL 508 and UL 873 spacing - 3.18 mm through air, 6.36 mm over surface.

Additional UL / CUL Ratings for AgSnO Contacts

Load Type	Voltage	Cycles	Temp.	1 Form A	1 Form C (SPDT)	
					NO	NC
Resistive	277/250 VAC	30,000	40°C	30 A	30 A	30 A

ORDERING INFORMATION

Example:	PTRA	-1C	-12	S		-1	-X
Model:	PTRA						
Contact Form:	1A, 1B, 1C						
Coil Voltage:	12, 24, 110, 120, 220, 240, 277						
Enclosure:	Nil: Open Frame; S: Sealed Plastic Case						
Insulation Material:	Nil: Class F						
Contact Material:	Nil: AgCdO, T: AgSnO ₂ In ₂ O ₃						
Spacing:	Nil: UL508, 1: UL 508 and UL 873 (Pin #6 Omitted)						
RoHS Compliant:	-X						

Box Quantity: 600; Inner Box 300

COIL DATA

Coil Voltage (VAC)		Resistance (Ohms $\pm 10\%$)	Must Operate Voltage Max (VAC)	Must Release Voltage Min (VAC)	Rated Current (mA)	Coil Power (VA)
Rated	Max					
12	15.6	27	9.0	3.6	166.6	2.0
24	31.2	120	18.0	7.2	83.3	
110	143	2360	82.5	33.0	18.1	
120	156	3040	90.0	36.0	16.6	
220	286	13490	165.0	86.0	9.1	
240	312	15740	180.0	72.0	8.3	
277	360.1	20300	207.75	83.1	7.2	

NOTES:

The use of any coil voltage less than the rated voltage will compromise the operation of the relays. Must Operate Voltage and Most Release Voltages are for test purposes only and are not to be used as design criteria.

CHARACTERISTICS


Operate Time	15 ms max.
Release Time	10 ms max.
Insulation Resistance	1,000 M Ω min, at 500 V
Power Consumption	2.0 VA
Dielectric Strength	50 Hz 1,500 V Between Open Contacts
	50 Hz 2,500 V Between Contacts and Coil
Shock Resistance	200 m/s ²

CHARACTERISTICS CONT





Vibration Resistance	10 Hz - 55 Hz Double Amplitude 1.5 mm
Terminal Strength	10N
Solderability	260°C for 5 seconds
Storage Temp. Range	-55°C to 125°C
Operating Temp. Range	-55°C to 100°C
Relative Humidity	85% (at 40°C)
Weight	31 grams
Material Compliant To	EU RoHS V2, EU REACH V3

MOUNTING TYPE (mm/inches)


Knock off, on top corner, nib for ventilation after soldering and water wash.

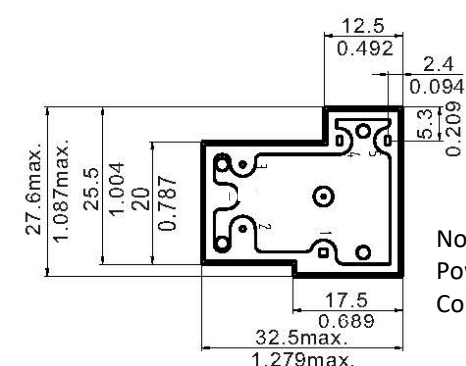

Note:
Power Pins are 0.8 mm x 1.5 mm
Coil Pins are $\varnothing 0.8$ mm

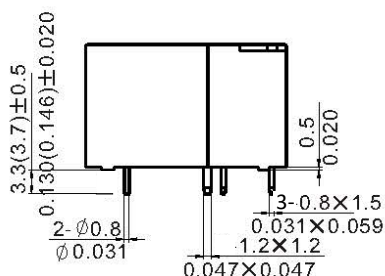



Open type

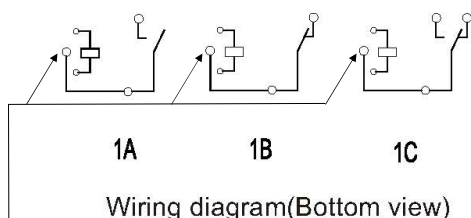

Wiring diagram(Bottom view)

-1 with Pin 6 Omitted



Mounting (Bottom view)

Available with Pin 6 UL508 or Without Pin 6 UL873 (-1)

PICKER 20550 Commerce Blvd, Rogers, MN 55374 USA
Sales: (763) 535-2339

Dimensions are listed for reference purposes only.

PTRA Rev O 11/2022



www.PickerComponents.com

e-mail: sales@pickercomponents.com

Specifications and Availability subject to change without notice.




T90 Style Relays

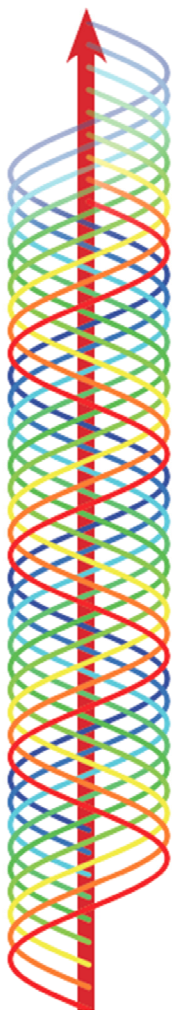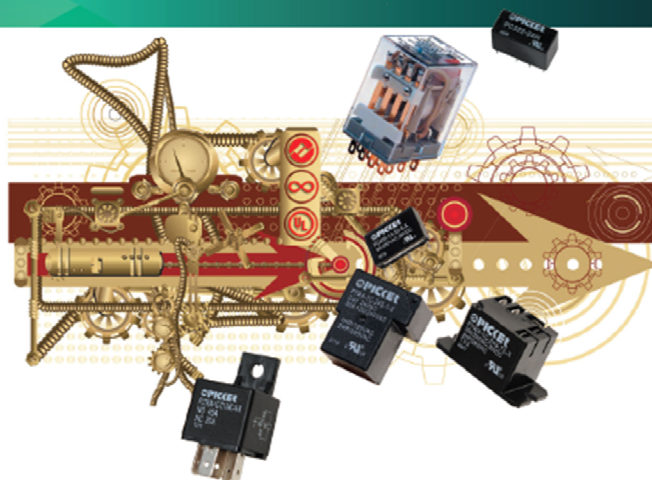

50 Amp

P TRE 50/35 Amp 1,500 W, 12,000 VA

- Larger Contacts than PTRD
- *Braided Copper Wire Added to Dissipate Heat from Contacts to the Coil Frame and PCB Pins*
- 50 Amp 240 VAC 10,000 Cycle UL Resistive Rating
- Class F Material -40° to 125° C Standard




45 Amp

New

P TRV 45 Amp 277 VAC 12,500 VA

- >1.8 mm Contact Gap
- 2.25 Watt Coil for Vibration Tolerance
- Class F Material -40° to 85° C Standard
- Designed for PV Inverter & Motor Control Applications



40 Amp

P TRD 40/30 Amp 1,200 W, 10,000 VA

P TRA AC Coil Options from 12 to 277 VAC

- Larger Contacts than PTRH
- 40 Amp 240 VAC UL Resistive Rating
- 25 Amp 277 VAC 100K Cycles UL Resistive Rating
- Class F Material -40° to 125° C Standard

30 Amp

P TRH 30/20 Amp 900 W, 7,500 VA

- 30 Amp 277 VAC UL General Purpose Rating
- 30 Amp 250 VAC 100K Cycle UL Resistive Rating
- Class B -40° to 100° C Standard, Optional Class F



Packaging Options (i.e. PTRH-T)



Dust Cover or Sealed
with Scratch off Nib



-T (T2 & T3) with PC
Pins and Contact QC



-T (T4 & T5) w/QC Tabs
& Mounting Ears



-OT (OT2 & OT3) with PC
Pins and Contact QC



-OT (OT4 & OT5) w/QC
Tabs & Mounting Ears

888-997-3933 • PickerComponents.com
Sales@PickerComponents.com

