



## Specifications


Electrical Ratings	300mA @ 30VDC
Electrical Life	10,000 cycles typical
Contact Resistance	<50mΩ initial
Actuation Force	250 ± 100gF
Actuation Travel	2.0mm total

Dielectric Strength	1000Vrms min
Insulation Resistance	>100MΩ min
Operating Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C

## Materials

Actuator	6/6 Nylon
Housing	Steel
Base	Phenolic
Contacts	Phosphor Bronze, Silver Plated
Terminals	Brass, Silver Plated

## Dimensions

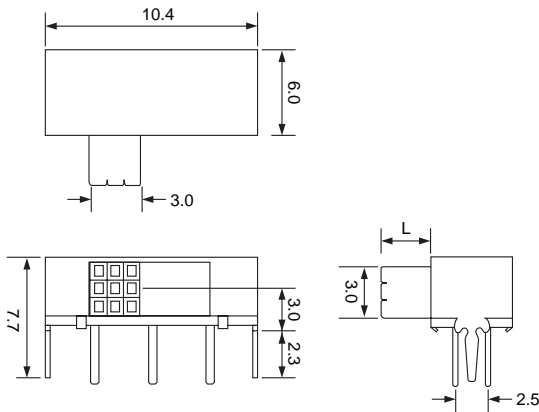

1. Series	MS2208	L4
MS2208		
2. Actuator Length		
L4 = 4mm		
L6 = 6mm		
L9 = 9mm		

## Schematic & PC Layout

