



Features

- Switching capacity up to 10A
- Small size and light weight
- Low coil power consumption, High contact load
- Strong resistance to shock and vibration

Contact Data

Contact Arrangement	2A, 2B, 2C = DPST N.O., DPST N.C., DPDT 3A, 3B, 3C = 3PST N.O., 3PST N.C., 3PDT 4A, 4B, 4C = 4PST N.O., 4PST N.C., 4PDT	Contact Resistance	< 50 milliohms initial
Contact Rating	2, &3 Pole : 10A @ 220VAC & 28VDC, General Purpose 4 Pole : 5A @ 220VAC & 28VDC, General Purpose	Contact Material	AgCdO
		Max Switching Power	2C, & 3C : 280W, 2200VA 4C : 140W, 110VA
		Max Switching Voltage	300VAC
		Max Switching Current	10A

Coil Data DC Parameters

Coil Voltage VDC		Coil Resistance Ω +/- 10%	Pick Up Voltage VDC (max)	Release Voltage VDC (min)	Coil Power W	Operate Time ms	Release Time ms
Rated	Max		75% of rated voltage	10% of rated voltage			
12	13.2	160	9.00	1.2	.90	25	25
24	26.4	640	18.00	2.4			
110	121.0	11000	82.50	11.0			

Coil Data AC Parameters

Coil Voltage VAC		Coil Resistance Ω +/- 10%	Pick Up Voltage VAC (max)	Release Voltage VAC (min)	Coil Power W	Operate Time ms	Release Time ms
Rated	Max		80% of rated voltage	30% of rated voltage			
12	13.2	46	9.60	3.6	1.20	25	25
24	26.4	184	19.20	7.2			
110	121.0	3750	88.00	33.0			
120	132.0	4550	96.00	36.0			
220	252.0	14400	176.00	66.0			

J152

General Data


Electrical Life @ rated load	500K cycles (2 pole), 200K cycles (3 pole), 100K (4 pole) typical
Mechanical Life	20M cycles (2 pole), 10M cycles (3 & 4 pole), typical
Insulation Resistance	100M Ω min. @ 500VDC
Dielectric Strength, Coil to Contact	1500V rms min. @ sea level
Contact to Contact	1500V rms min. @ sea level
Shock Resistance	100m/s ² for 11 ms
Vibration Resistance	1.27mm double amplitude 10~40Hz
Terminal (Copper Alloy) Strength	10N
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +155°C
Solderability	260°C for 5 s
Weight	32g

Ordering Information


1. Series	J152	3C	T	12VDC		
J152						
2. Contact Arrangement						
2A, 2B, 2C						
3A, 3B, 3C						
4A, 4B, 4C						
3. Termination						
T = Solder lugs / Plug-in						
F = Solder lugs / Plug-in with Flange						
P = PCB Pins						
4. Coil Voltage						
12VDC 12VAC						
24VDC 24VAC						
110VDC 110VAC						
5. Optional LED						
Blank = No indicator LED						
D = With indicator LED						
6. Gold Option						
Blank = Standard contacts						
G = Gold over standard contacts						
7. Push to Test Option						
Blank = Without push to test button						
T = With push to test button						

Dimensions


Units = mm

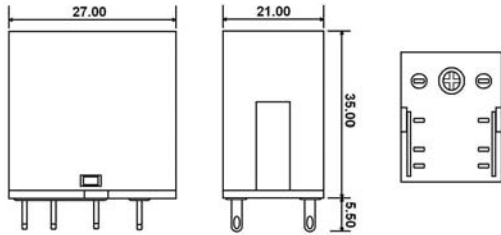


2 Pole

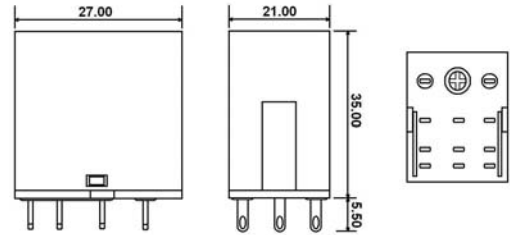

3 Pole

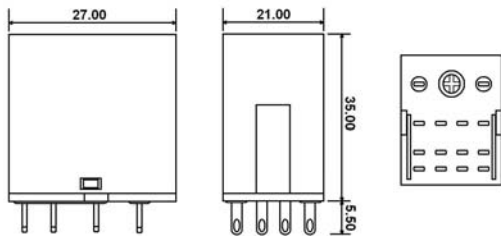


4 Pole

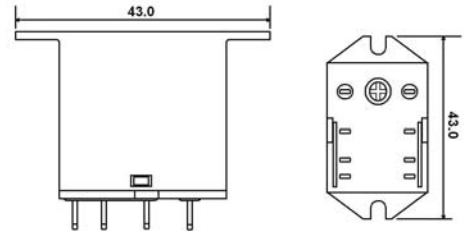


Flange Mount with Solder Lugs

Termination Options





PC Pins





Solder Lugs

Schematics & PC Layouts



Bottom Views



2C



3C



4C