



FEATURES

- 2, 3 or 4 Pole Contact Forms
- AC & DC Coils Available
- Available as Plug-In or PC Pins
- Available with Gold Plated Contacts
- Available with Top Mounting Flange
- Available with Push-To-Test Button



UL / CUL Ratings

Contact Form	2 Form C, DPDT	
Rated Load	Voltage	Amps
General Purpose, 6K cycles, 40°C	28VDC	10A
General Purpose, 6K cycles, 40°C	220VAC	10A

Contact Form	3 Form C, 3PDT	
Rated Load	Voltage	Amps
General Purpose, 6K cycles, 40°C	28VDC	10A
General Purpose, 6K cycles, 40°C	220VAC	10A

Contact Form	4 Form C, 4PDT	
Rated Load	Voltage	Amps
General Purpose, 6K cycles, 40°C	28VDC	5A
General Purpose, 6K cycles, 40°C	220VAC	5A

CHARACTERISTICS

Insulation Resistance	100MΩ min. at 500 VDC
Dielectric Strength	1500V rms, between coil & contacts 1000V rms, between open contacts 1000V rms, between poles
Power Consumption	0.9W, 1.2VA
Terminal Strength	8N QC; 4N PCB
Solderability	260°C 5 s ± 0.5 s
Operating Temperature	-40°C to 85°C
Storage Temperature	-40°C to 155°C
Shock Resistance	100 m/s ² 11 ms
Vibration Resistance	10-55 Hz double amplitude 1.5mm
Weight	~37g

CONTACT DATA

Maximum Switching Power	280W, 2200VA
Maximum Switching Voltage	48VDC, 277VAC
Maximum Switching Current	10A
Material	AgCdO
Initial Contact Resistance	50 mΩ max.
Service Life	Mechanical 1 x 10 ⁷ operations
	Electrical 1 x 10 ⁵ operations

Values can change due to the switching frequency, desired reliability levels, environmental conditions, and in-rush current levels. It is recommended to test to actual load conditions for the application. It is the users responsibility to determine the performance suitability for their specific application. The use of any coil voltage less than the rated coil voltage may compromise the operation of the relay.

ORDERING INFORMATION

Example	PC118	-2C	-P	-C1	-120A	-LM	-X
Model:	PC118						
Contact Form:	2C 3C 4C						
Terminal Type:	Nil = Solder Lug P = PC Pin						
Case Type:	Nil = Plain Case C1 = Flange Mount Case						
Coil:	12A = 12VAC 24A = 24VAC 120A = 120VAC 220A = 220VAC 12D = 12VDC 24D = 24VDC 110D = 110VDC						
Options*:	Nil = None G = Gold Plated Contacts L = LED Indicator M = Push-To-Test Button						
RoHS Compliant:	X = RoHS Compliant						

*May select multiple options



COIL DATA - DC Coil Power

Coil Voltage		Resistance (Ohms $\pm$ 10%)	Pick Up Voltage Max. VDC	Release Voltage Min. VDC	Coil Power W	Operate Time ms	Release Time ms
Rated	Maximum						
12	13.2	160	9.0	1.2	.9	25	25
24	26.4	640	18.0	2.4			
110	121	11000	82.5	11.0			

COIL DATA - AC Coil Power

Coil Voltage		Resistance (Ohms $\pm$ 10%)	Pick Up Voltage Max. VAC	Release Voltage Min. VAC	Coil Power VA	Operate Time ms	Release Time ms
Rated	Maximum						
12	13.2	46	9.6	3.6	1.2	25	25
24	26.4	184	19.2	7.2			
120	132	4550	96.0	36.0			
220	252	14400	176.0	66.0			


DIMENSIONS mm (inches)

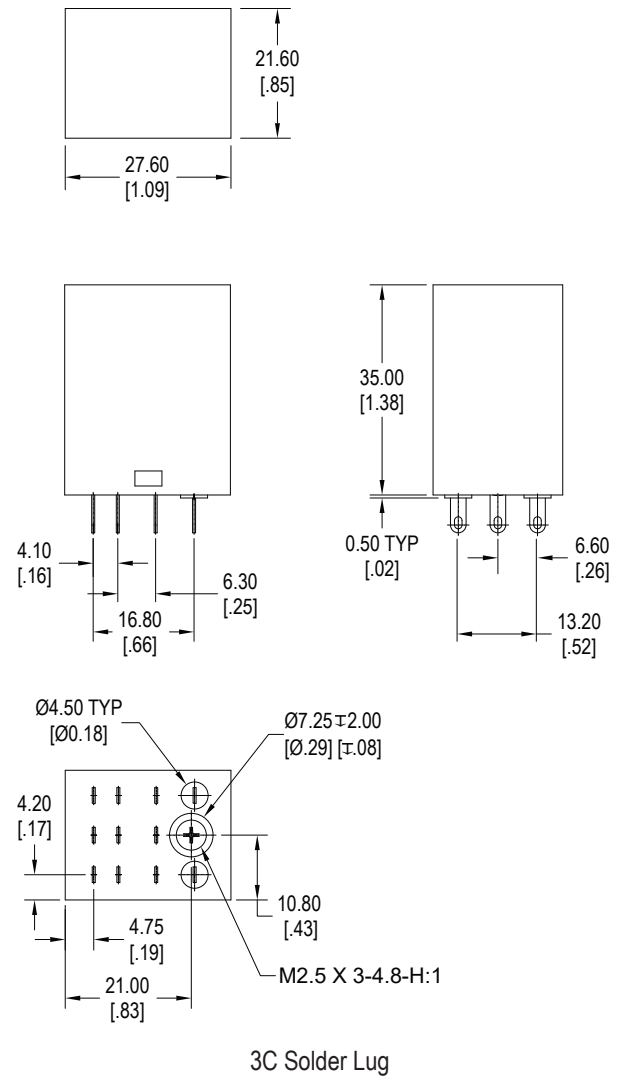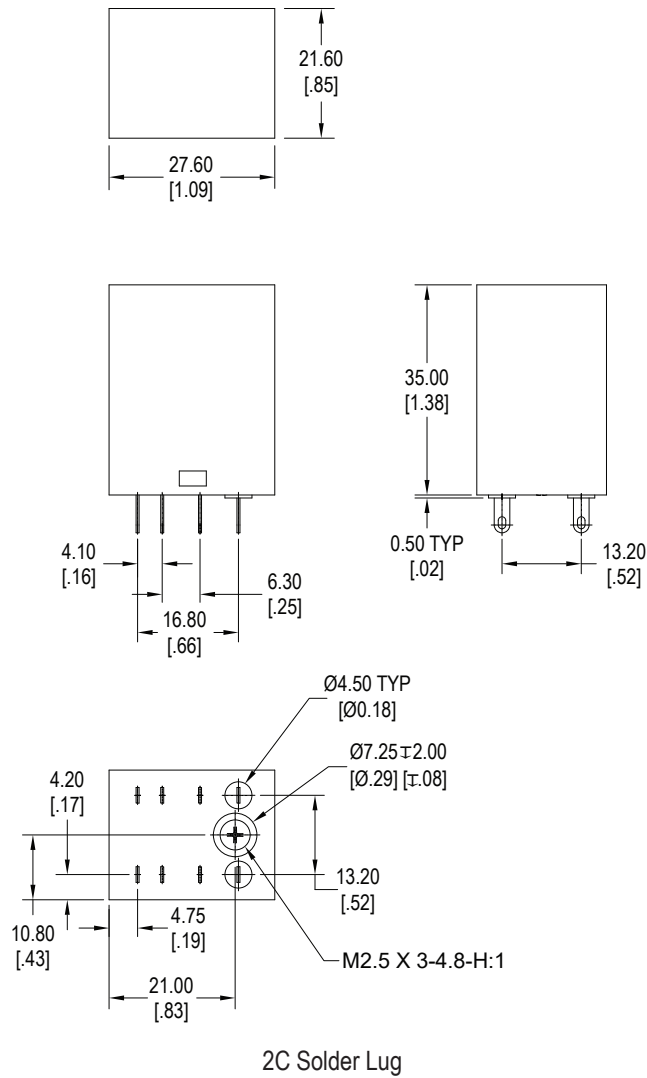



The top view shows a square footprint with a width of 27.60 [1.09] and a height of 21.60 [.85].

The front view shows a rectangular footprint with a width of 16.80 [.66] and a height of 6.30 [.25]. It features four pins on the left side, each with a diameter of 4.10 [.16].

The side view shows a rectangular footprint with a width of 13.20 [.52] and a height of 35.00 [1.38]. It features four pins on the left side, each with a diameter of 4.40 [.17]. The pins are spaced 8.80 [.35] apart. The distance from the top of the footprint to the top of the pins is 0.50 TYP [.02].

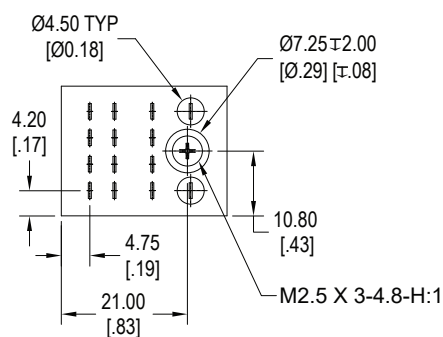


4C

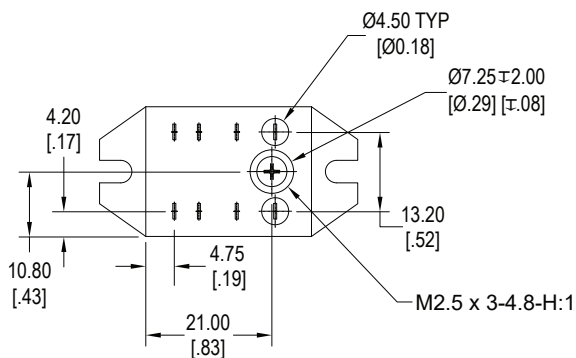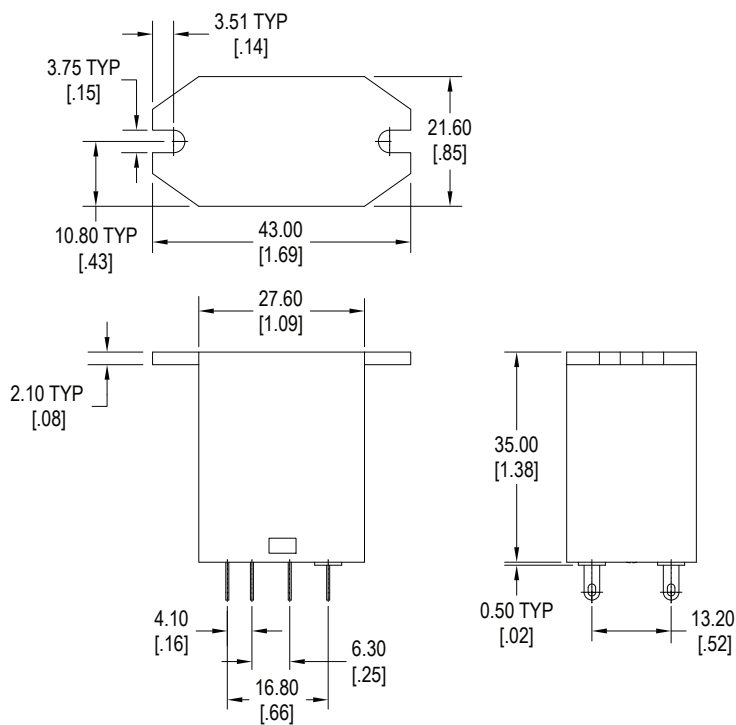


Flange Option

Solder Lug, Standard

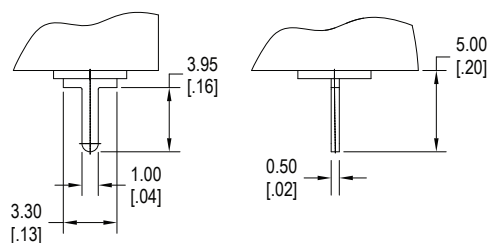


PC Pin

TERMINATION OPTIONS

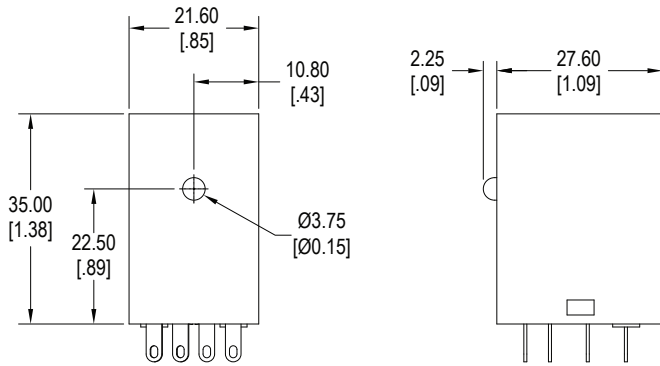


Push-To-Test Button, Standard

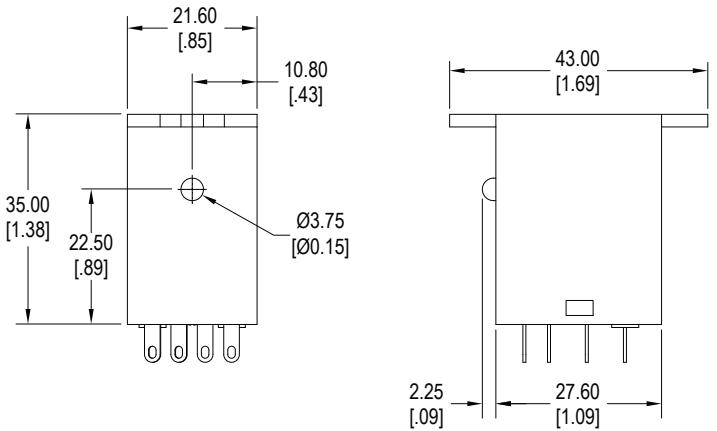


Push-To-Test Button, Flange


SCHEMATICS & PC LAYOUT *Bottom Views*




2C




3C




4C

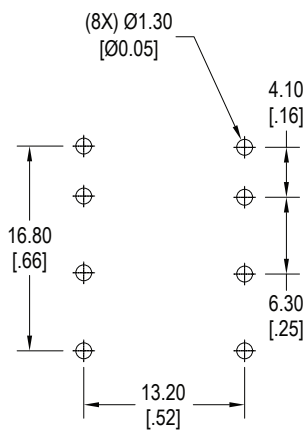

2C



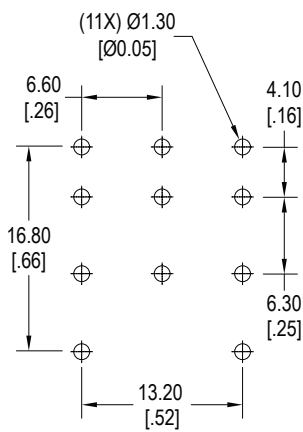


3C


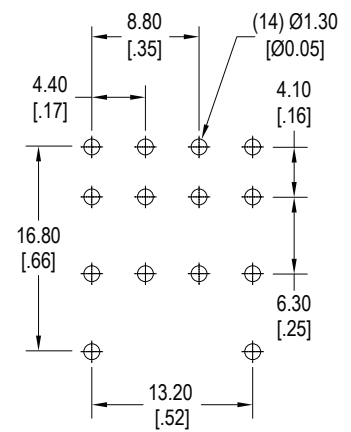


4C




SOCKETS Unit = mm [in]

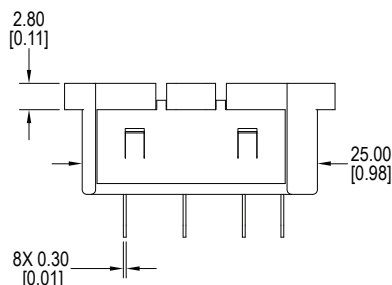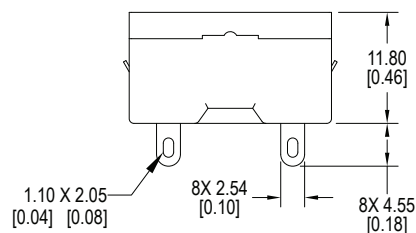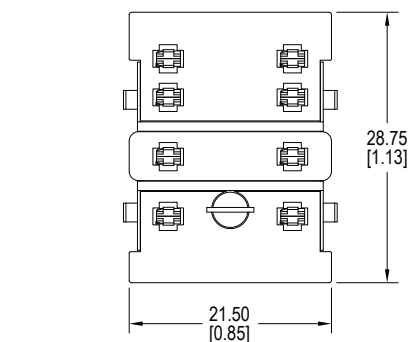



RS1522A

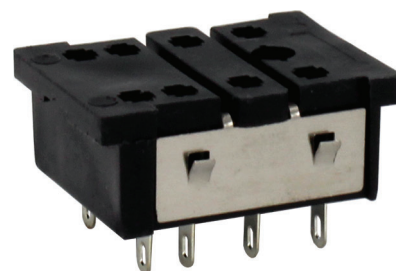

Suggested Panel Cutout

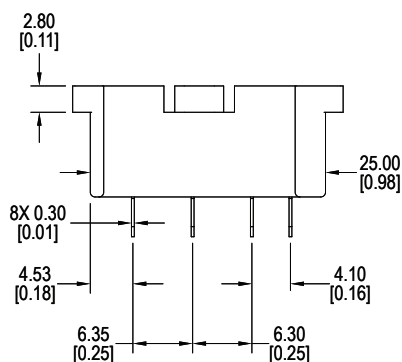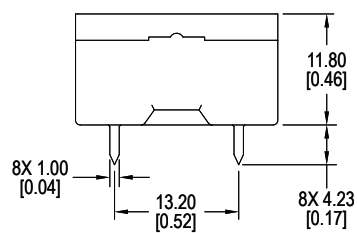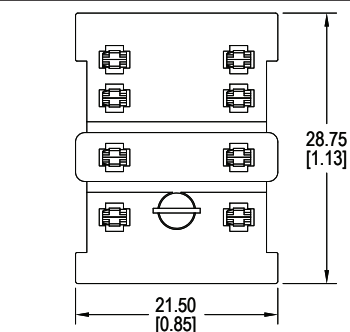


RS1522B

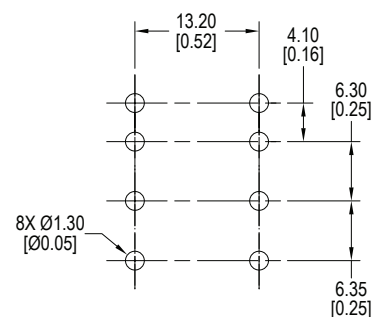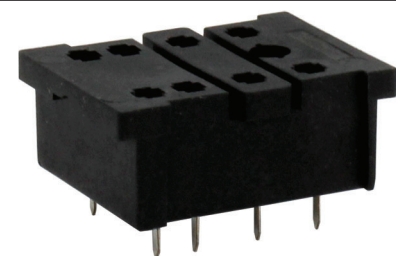


Suggested PC Layout
Top View


SOCKETS Unit = mm [in]

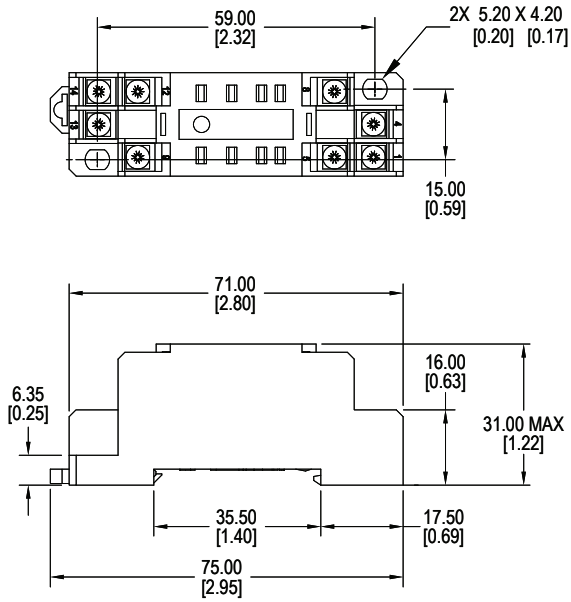


RS1522C



Schematic



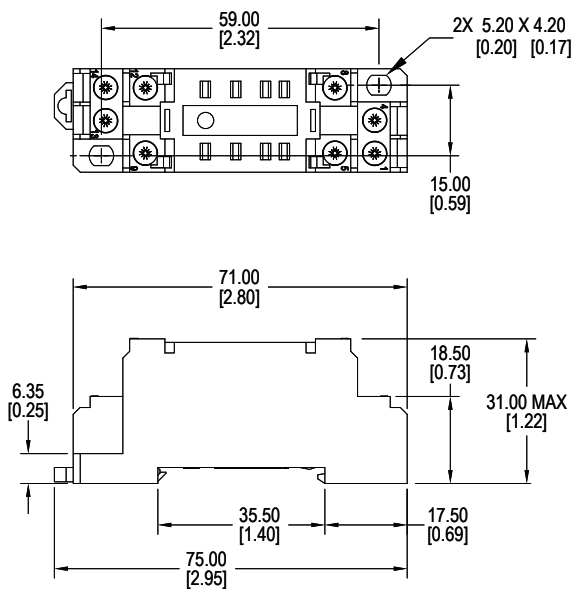


RS1522D




Schematic




SOCKETS Unit = mm [in]

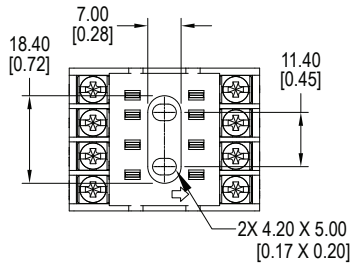


RS1522E






Schematic

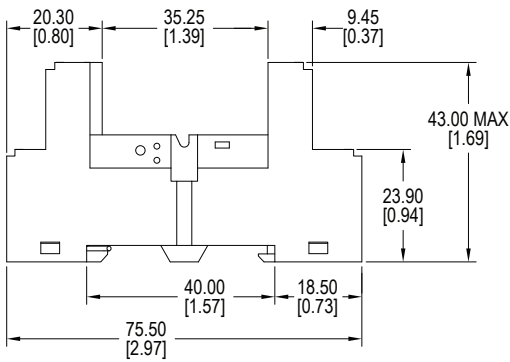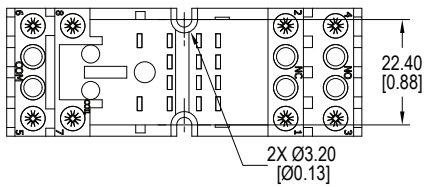





RS1522F



Schematic

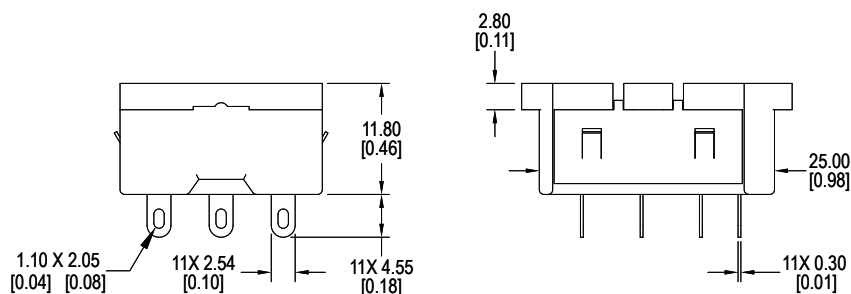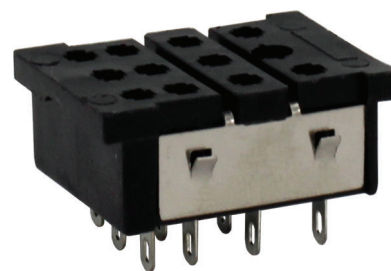
[illegible]

Suggested Panel Curout

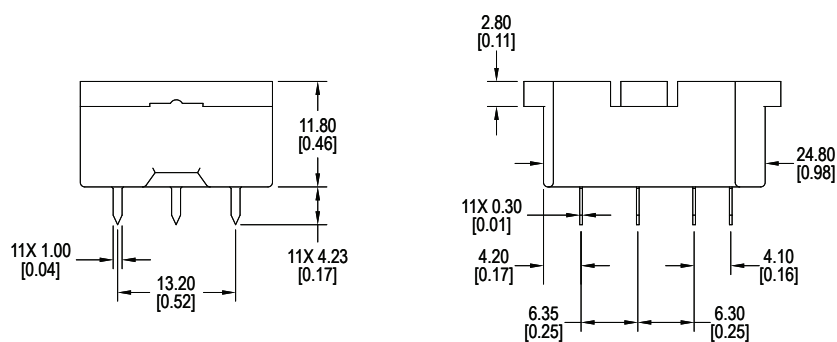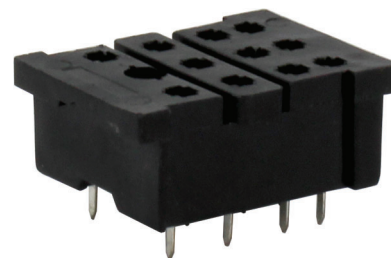


Schematic


SOCKETS Unit = mm [in]

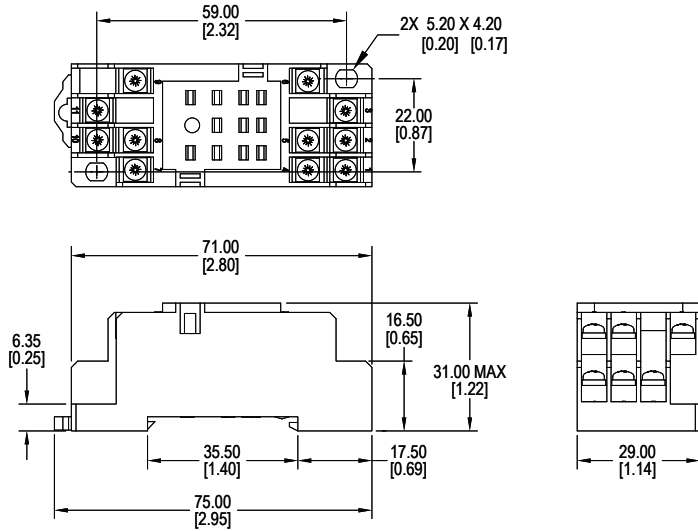



RS1523C



Schematic

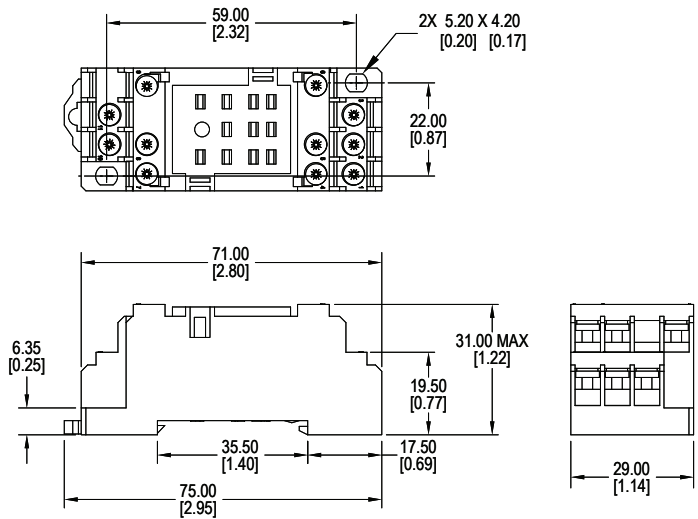


RS1523D


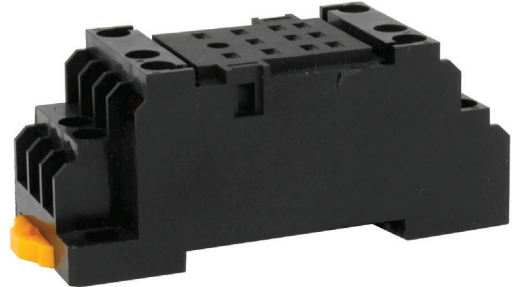


Schematic


SOCKETS Unit = mm [in]

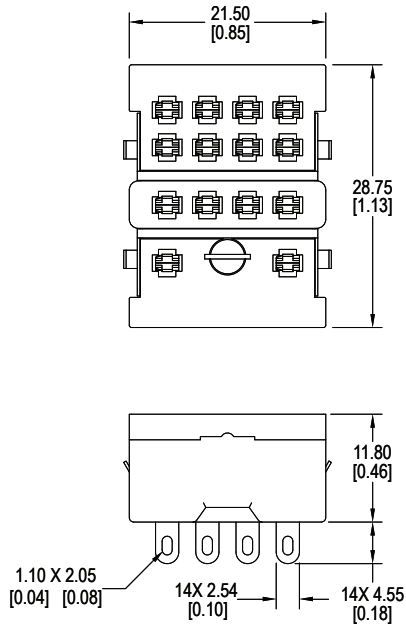




RS1524A

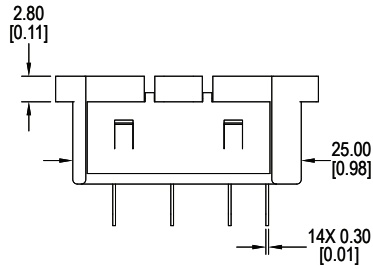

Suggested Panel Cutout

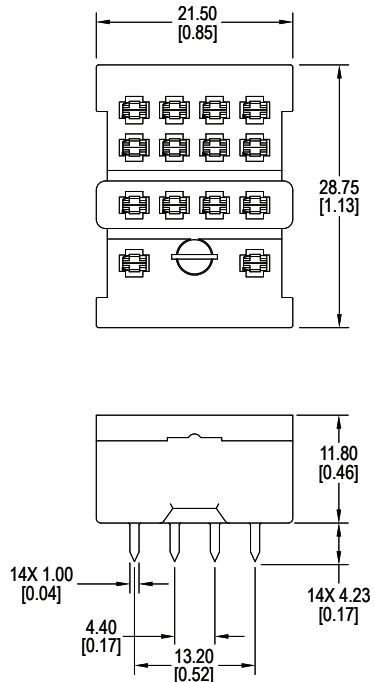


RS1524B

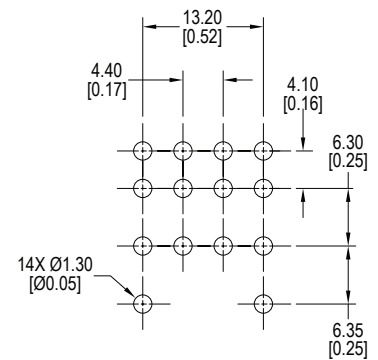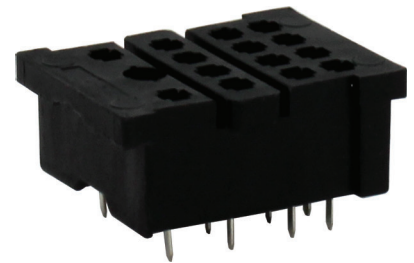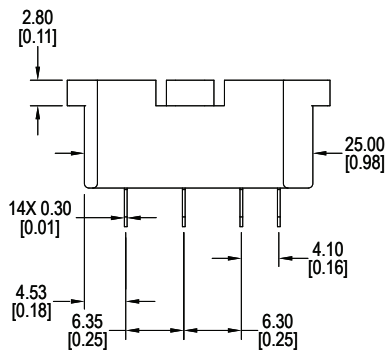


Schematic


SOCKETS Unit = mm [in]

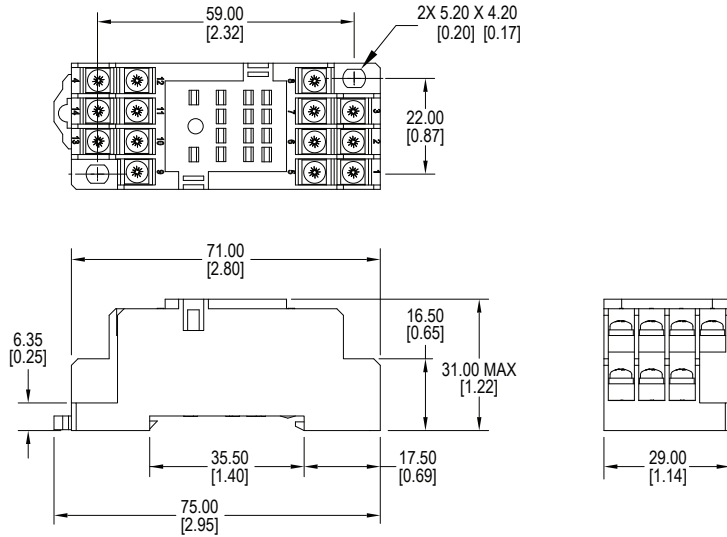


RS1524C

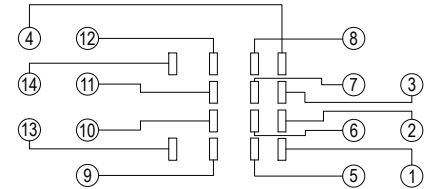

Schematic

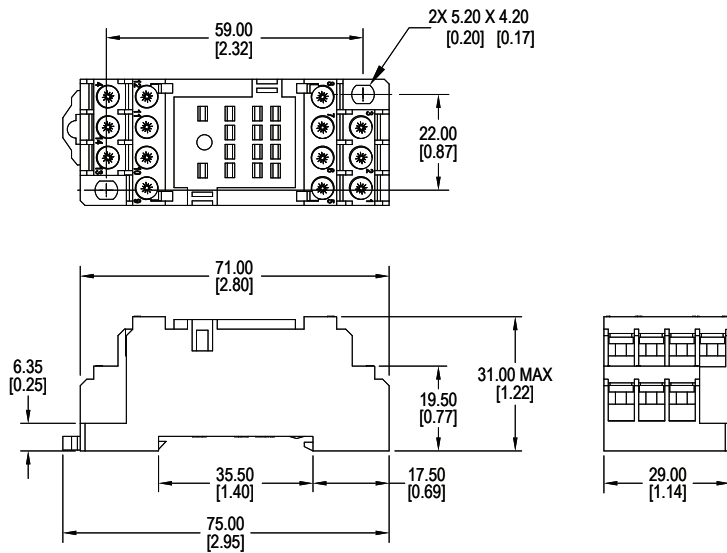

RS1524D

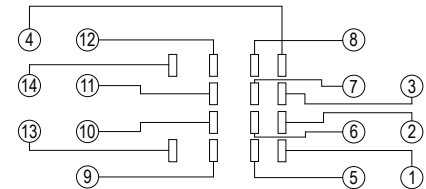

Schematic