

Features

- Switching capacity up to 30A
- Dual relay available
- Withstands high temperature : 105°C operating temperature
- PC pin mounting available
- Ultra light weight : 4g



Contact Data*

Contact Arrangement	1A = SPST N.O. 1C = SPDT 2A = (2) SPST N.O. 2C = (2) SPDT	Contact Resistance	< 30 milliohms initial
Contact Rating	1A : 25A, 30A @ 14VDC 1C : 25A, 30A @ 14VDC N.O. : 20A, 25A @ 14VDC N.C. 2A : 25A, 30A @ 14VDC 2C : 25A, 30A @ 14VDC N.O. : 20A, 25A @ 14VDC N.C.	Contact Material	AgSnO ₂
		Max Switching Power	420W
		Max Switching Voltage	28VDC
		Max Switching Current	40A On, 30A Off (current flow 3 sec max with make/ break ratio of 1:10)
		Limiting Continuous Current	NO/NC : 30A/25A @ 23°C NO/NC : 25A/20A @ 85°C

Coil Data*

Coil Voltage VDC		Coil Resistance Ω +/- 10%	Pick Up Voltage VDC (max)	Release Voltage VDC (min)	Coil Power W	Operate Time ms	Release Time ms
Rated	Max		58% of rated volt- age	10% of rated volt- age			
5	6.0	45	2.9	0.5	.55	≤ 3	≤ 1.5
9	10.8	147	5.2	0.9			
10	12.0	181	5.8	1.0	.57		
12	14.4	254	7.0	1.2	.55	≤ 4	
24	28.8	1152	13.9	2.4			

General Data*

Electrical Life @ rated load	100K cycles, average
Mechanical Life	10M cycles, average
Insulation Resistance	100M Ω min. @ 500VDC initial
Dielectric Strength, Coil to Contact Contact to Contact	500V rms min. @ sea level initial 500V rms min. @ sea level initial
Shock Resistance	300m/s ² for 6 ms
Vibration Resistance	1.27mm double amplitude 10~40Hz
Terminal (Copper Alloy) Strength	10N
Operating Temperature	-40°C to +105°C
Storage Temperature	-40°C to +155°C
Solderability	260°C for 5 s
Weight	4g, 8g



* Values can change due to the switching frequency, desired reliability levels, environmental conditions and in-rush load levels. It is recommended to test actual load conditions for the application. It is the user's responsibility to determine the performance suitability for their specific application. The use of any coil voltage less than the rated coil voltage may compromise the operation of the relay.

Ordering Information

1. Series	A10	1C	S	12VDC
2. Contact Arrangement				
1A = SPST N.O.				
1C = SPDT				
2A = (2) SPST N.O.				
2C = (2) SPDT				
3. Sealing Option				
S = Sealed				
4. Coil Voltage				
5VDC				
9VDC				
10VDC				
12VDC				
24VDC				


Dimensions

Units = mm

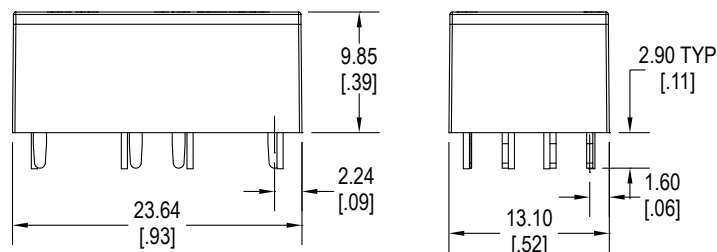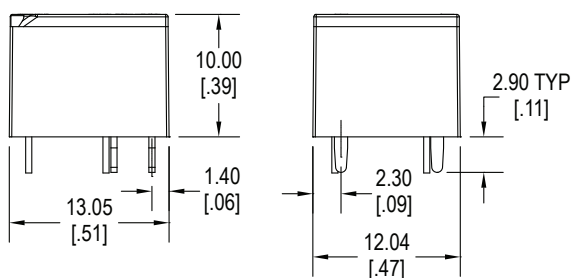


Schematics & PC Layouts



Bottom Views




1A



1C



2A



2C

