

Specifications

Electrical Ratings	100mA @ 30VDC	Dielectric Strength	1000Vrms min
Electrical Life	100,000 cycles typical	Insulation Resistance	>100MΩ min
Contact Resistance	<50mΩ initial	Operating Temperature	-40°C to 85°C
Actuation Force	180 ± 50gF	Storage Temperature	-40°C to 85°C
Actuator Travel	1.5mm to lock 2.5mm to full travel		


Materials

Actuator	Acetal
Housing	Polybutylene Terephthalate (BT)
Cover	Acetal
Latching Pin	Stainless Steel
Spring	Stainless Steel
Contacts	Phosphor Bronze, Silver Plated
Terminals	Brass, Silver Plated


Ordering Information

1. Series	LP2202	F180	N	C022
LP2202				
2. Actuation Force F180 = F180gF				
3. Latching N = Non-Latching * Contact Factory for Latching Option				
4. Cap Options Blank = No Cap C01 C02 C03 C04	Cap Colors **See Cap Options for color availability			

Dimensions

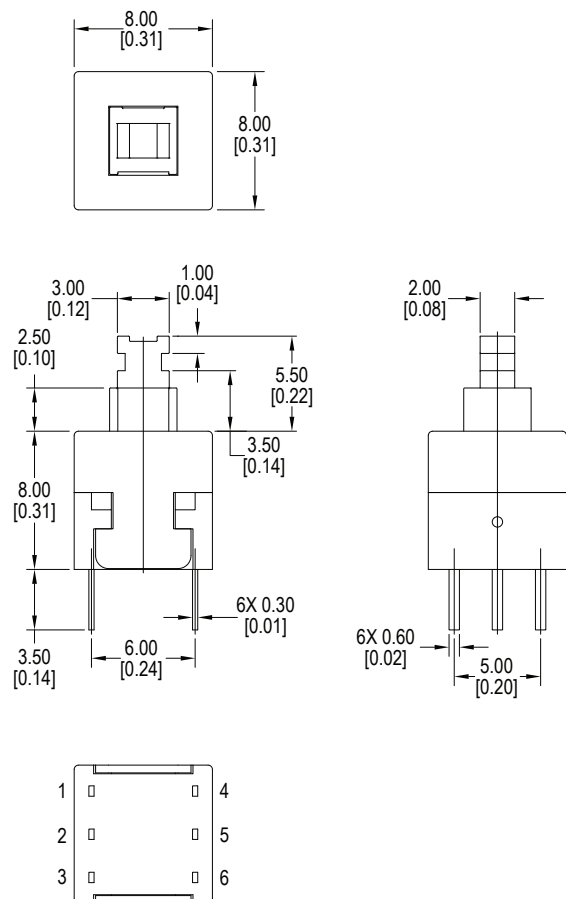


Schematic & PC Layout

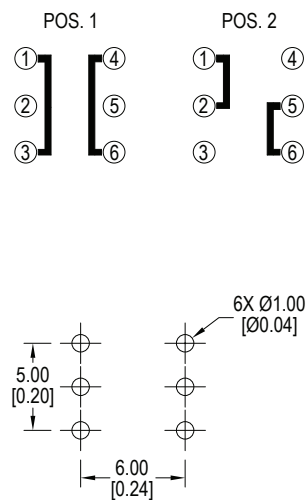


Cap Options

Contact Factory for other available colors


C01_

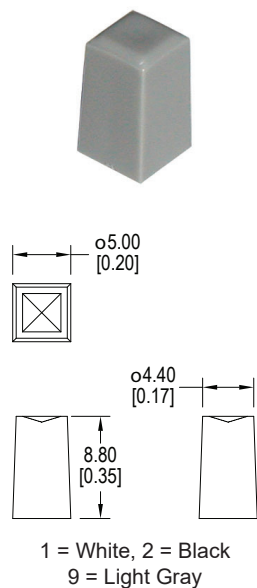

C02_

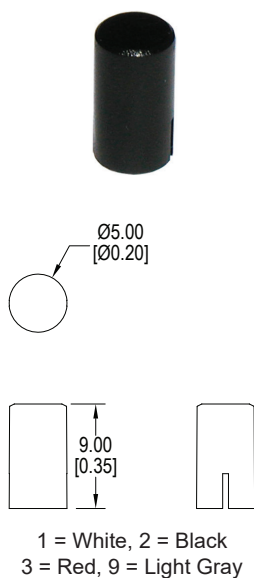

C03_

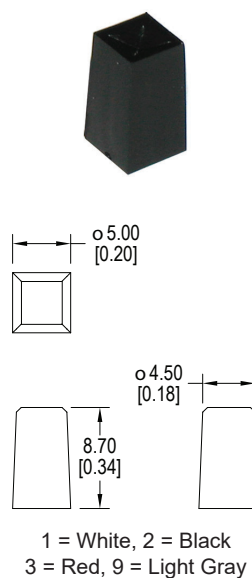

C04_

