


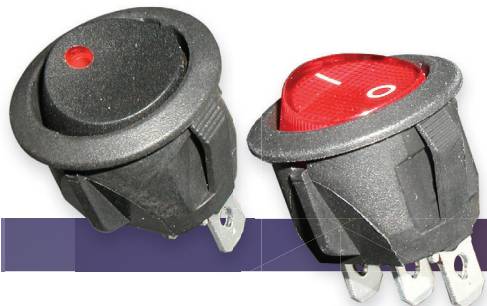

Neon / LED Illuminated Round Rocker

- *Wide variety of applications from industrial to consumer products*
- *Single pole single throw with neon lamp and LED options*
- *Quick connect termination*
- *Full or dot illumination*
- *Numerous choices in illumination colors and markings*

Specifications

Switch Function	SPST	Contact Resistance	≤ 50mΩ initial
Electrical Ratings	UL 61058-1	Dielectric Strength	1500Vrms min
	15A @ 125VAC General Purpose	Insulation Resistance	≥ 100MΩ min
	10A @ 250VAC General Purpose	Operating Temperature	-20°C to 70°C
Electrical Life	10,000 cycles typical	Storage Temperature	-20°C to 70°C
		Sealing Degree	IP40

Materials


Base	6/6 Nylon
Housing	6/6 Nylon
Actuator	6/6 Nylon or Polycarbonate
Actuator Lens	Polycarbonate (PC)
Contacts	Silver Alloy
Terminals	Brass, Silver Plated

Ordering Information

1. Series	RR3	1	1	2	23T	FB	C	N17
RR3								
2. Number of Poles 1 = Single Pole								
3. Switch Function 1 = OFF - ON								
4. Housing Color 1 = White 2 = Black 9 = Gray								
5a. Solid Actuator Color with Lens — <i>Requires lens color choice below</i> 1 = White 4 = Yellow 7 = Blue 2 = Black 5 = Green 8 = Purple 3 = Red 6 = Orange 9 = Gray Lens Color 0T = Clear (Transparent) 5T = Green (Transparent) 3T = Red (Transparent) 7T = Blue (Transparent) 4T = Yellow (Transparent)								
5b. Transparent Actuator Color: 1T = White 5T = Green 3T = Red 6T = Orange 4T = Yellow 7T = Blue								
6. Actuator Marking — <i>Requires marking color choice below</i> A E B F C G D K Actuator Marking Color Blank = No Marking B = Black W = White R = Red								
7. Terminal Option C = .187" Quick Connect / Solder Lug								
8a. Lamp Options* N1 = 125VAC Neon Lamp N2 = 250VAC Neon Lamp <i>*Requires lamp color choice below</i> Neon Lamp Colors 0 = standard lamp 5 = Green 7 = Blue								
8b. LED Options** R12 = Red LED 12V B12 = Blue LED 12V R24 = Red LED 24V B24 = Blue LED 24V Y12 = Yellow LED 12V W12 = White LED 12V Y24 = Yellow LED 24V W24 = White LED 24V G12 = Green LED 12V G24 = Green LED 24V								
**only available with fully transparent actuators (Section 5b)								


Dimensions

Solid Actuator with Lens

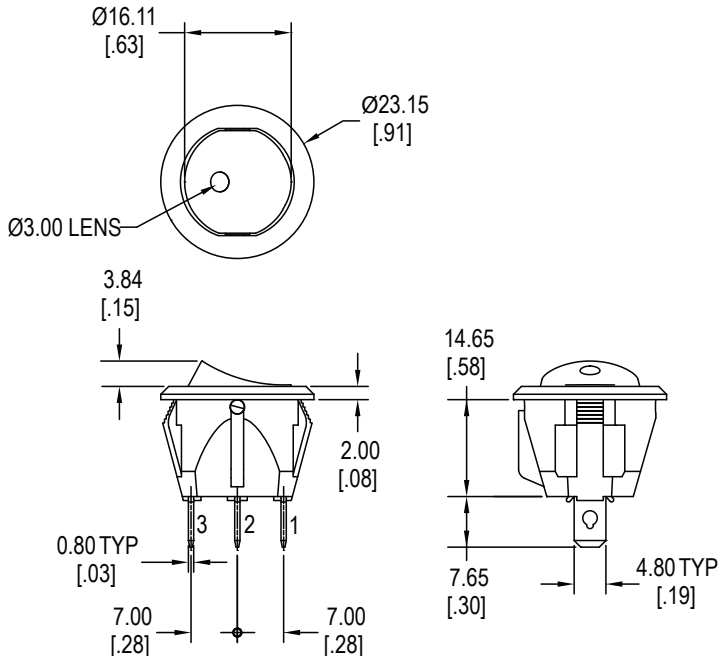


		
Function	Position 1	Position 2
1	OFF	ON
Terminals	--	1 ~ 2

Transparent Actuator

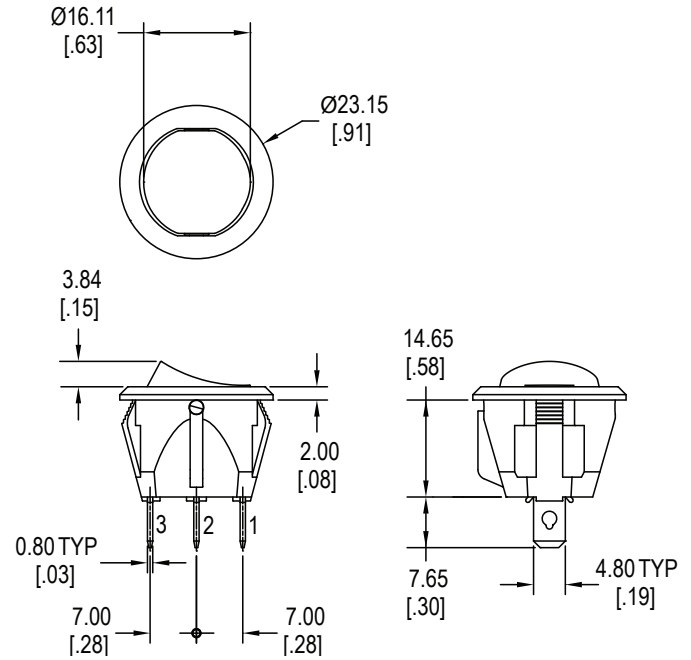


Actuator Marking Options


A Marking




B Marking




C Marking




D Marking




E Marking




F Marking



G Marking




K Marking




Schematics

Neon



LED with Resistor




LED Characteristics

LED Ratings		Color					
		R	Y	G	B	W	Units
Reverse Voltage	V_R	5	5	5	5	5	V
Forward Current (avg)	I_F	30	30	30	30	30	mA
Reverse Current $V_R = 5V$	I_R	10	10	10	10	10	μA
Power Dissipation	P_T	56	56	46	72	76	mW
Operating & Storage Temperature	T_A	-40 ~ +85					C°
Forward Voltage (min) $I_F = 20mA$	V_F	1.7	1.7	1.8	2.8	2.8	V
Forward Voltage (max) $I_F = 20mA$	V_F	2.4	2.4	2.4	3.4	3.4	V
Wavelength (min) $I_F = 20mA$	λ_d	620	585	565	460	n/a	nm
Wavelength (max) $I_F = 20mA$	λ_d	630	595	575	470	n/a	nm
Luminous Intensity, $I_F = 20mA$	LI	50	150	30	140	500	mcd
Viewing Angle	Θ	50	50	70	120	70	deg

Panel Cut Out

Panel cut out material thickness : 0.8mm ~ 3.0mm



Terminal Options

C

