

Automotive Plug-In / PCB Mini ISO Relay

PC792B



FEATURES

- 40 Amps Continuus Carrying Current
- Internal Diode or Resistor Option
- Sockets Available
- Fully Automated Assembly



CONTACT RATINGS

Contact Form		1A SPST N.O.
		1C SPDT
		1AA SPST N.O. (2 #87 Terminals)
Contact Rating	1A	40A @ 14VDC, resistive
		20A @ 28VDC, resistive
	1C	40A @ 14VDC, resistive
		20A @ 28VDC, resistive
	1AA	40A @ 14VDC, resistive
		20A @ 28VDC, resistive
Contact Rating	1C	1AA SPST N.O. (2 #87 Terminals) 40A @ 14VDC, resistive 20A @ 28VDC, resistive 40A @ 14VDC, resistive 20A @ 28VDC, resistive 40A @ 14VDC, resistive 40A @ 14VDC, resistive

CHARACTERISTICS

Insulation Resistance	100 MΩ min. at 500 VDC			
Dielectric Strength	500 Vrms, 50 Hz, between contacts			
	750 Vrms, 50 Hz, between coil & contacts			
Power Consumption	1.6W, 1.9W, 2.3W			
Terminal Strength	8N quick connect			
Solderability	260°C 5 s ± 0.5 s			
Operating Temperature	-40°C to 125°C			
Storage Temperature	-40°C to 155°C			
Shock Resistance	147 m/s ² 11 ms			
Vibration Resistance	10-40Hz; 1.5mm double amplitude			
Weight	31.0g			

CONTACT DATA

Maximum Switch	hing Power	560 W		
Maximum Switch	hing Voltage	75 VDC		
Maximum Continuous Current		40 A		
Material		AgSnO ₂		
Initial Contact Resistance		30 m $Ω$ max.		
Service Life	Mechanical	1 x 10 ⁷ operations		
	Electrical	1 x 10 ⁵ operations		

Values can change due to the switching frequency, desired reliability levels, environmental conditions, and in-rush current levels. It is recommended to test to actual load conditions for the application. It is the users responsibility to determine the performance suitability for their specific application. The use of any coil voltage less than the rated coil voltage may compromise the operation of the relay.

Automotive Plug-In / PCB Mini ISO Relay

PC792B

ORDERING INFORMATION


Example	PC792B	-1C	-C	-12	S	1.9	-D	N	-X
Model:	PC792B								
Contact Form:	1A 1C 1AA								
Mounting Version:	C = Plug-In C1 = Plastic Bracket C2 = Metal Bracket C3 = Weatherproof Case with P = PC Pins *only available sealed	Metal Bracket	*						
Coil Voltage:	6 = 6VDC 9 = 9VDC 12 = 12VDC 24 = 24VDC 48 = 48VDC								
Enclosure:	C = Dust Cover S = Sealed S1 = Flux Tight (1)				_				
Coil Power:	Nil = 1.6W 1.9 = 1.9W 2.3 = 2.3W (2)					_			
Parallel Component:	Nil = None D = Diode D1 = Reverse Diode R = Resistor						_		
Terminal Plating:	Nil = PC Pin N = Tin Plated Terminals, star	ndard on all Plu	ıg-In models					_	
RoHS Compliant:	-X								•
(1) Flux Tight relays are constructed su	uch that Flux will not enter the relay in an automated sold	ering process, they are NC	T suitable for water wash o	leaning.					


⁽¹⁾ Flux Tight relays are constructed such that Flux will not enter the relay in an automated soldering process, they are NOT suitable for water wash cleaning (2) Special coil - minimum order quantities apply.


COIL DATA


Coil V	oltage/	Resistance (Ohms ± 10%)					Pick Up Voltage Max. VDC	Release Voltage Min. VDC	Coil Power W	Operate Time ms	Release Time ms
Rated	Maximum	1.6W	1.9W	2.3W							
6	7.8	22.5	19	15.6	3.9	0.6			≤10		
9	11.7	50.6	n/a	n/a	5.9	0.9	1.6				
12	15.6	90	75.8	62.6	7.8	1.2	1.9	≤10			
24	31.2	360	303.2	250.4	15.6	2.4	2.3				
48	62.4	1440	n/a	n/a	31.2	4.8					


DIMENSIONS mm (inches)














Standard with PC Pins (P)

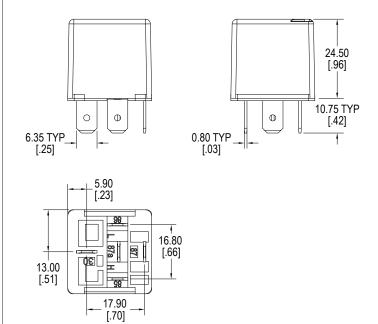


Standard with Quick Connect (C)


DIMENSIONS mm (inches)




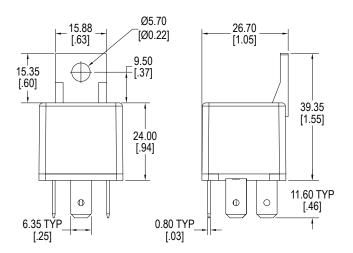




Quick Connect with Plastic Bracket (C1)




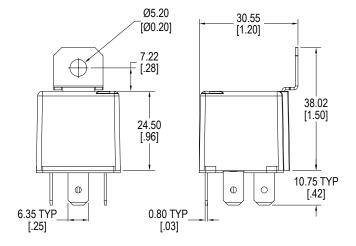




Quick Connect with Metal Bracket (C2)

DIMENSIONS mm (inches)

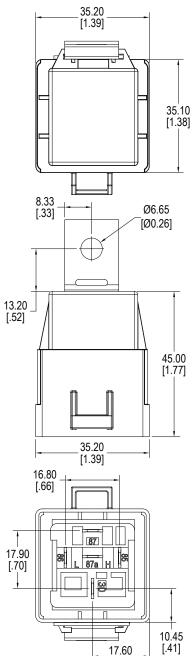


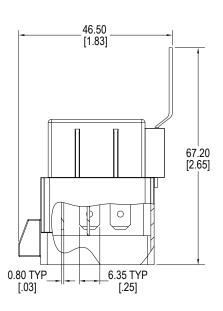


17.60 [.69] [.41]

Quick Connect with Weatherproof Shroud (C3)


SCHEMATICS Bottom Views




1A




1C




1AA



1C with Resistor



1C with Diode



1C with Reverse Diode

PC LAYOUT

