

#### Features

- UL F class rated standard
- · Small size and light weight
- · Capable of handling 1000W lamp loads
- Designed to withstand high inrush loads (100A)

## Contact Data

Contact Arrangement	1A = SPST N.O.	
	1C = SPDT	
UL Contact Ratings	20A @ 125VAC	
	16A @ 277VAC	
	10A @ 250VAC, General Purpose, 20K cycles, 85°C	
	TV-8, 120VAC	
	1hp @ 125/250 N.O.	
	1/2hp @ 125/250 N.C.	
TÜV Contact Rating	NO: 15A @ 250VAC, Resistive, 10K cycles, 85°C	

	1		
Contact Resistance	< 50 milliohms initial		
O sector of Martinel			
Contact Material	AgSnO <sub>2</sub> In <sub>2</sub> O <sub>3</sub>		
Maximum Switching Power	500W, 4500VA		
Maximum Switching Voltage	380VAC, 110VDC		
Maximum Switching Current	20A		

# Coil Data

Coil Voltage VDC Ω +/- 10%		Pick Up Voltage VDC (max)	Release Voltage VDC (min)	Coil Power W	Operate Time ms	Release Time ms		
Rated	Max	.36W	.45W	75% of rated voltage	10% of rated voltage			
5	6.5	70	56	3.75	0.5	.36		
9	11.7	225	180	6.75	0.9			
12	15.6	400	320	9.00	1.2		10	5
24	31.2	1600	1280	18.00	2.4	.+0		
48	62.4	6400	5120	36.00	4.8			

## **General Data**

Electrical Life @ rated load	100K cycles, typical		
Mechanical Life	10M cycles, typical		
Insulation Resistance	100M Ω min. @ 500VDC		
Dielectric Strength, Coil to Contact	2500V rms min. @ sea level		
Contact to Contact	1500V rms min. @ sea level		
Shock Resistance	100m/s <sup>2</sup> for 11 ms		
Vibration Resistance	1.50mm double amplitude 10~40Hz		
Terminal (Copper Alloy) Strength	10N		
Operating Temperature	-55°C to +125°C		
Storage Temperature	-55°C to +155°C		
Solderability	260°C for 5 s		
Weight	10g		

\* Values can change due to the switching frequency, desired reliability levels, environmental conditions and in-rush load levels. It is recommended to test actual load conditions for the application. It is the user's responsibility to determine the performance suitability for their specific application. The use of any coil voltage less than the rated coil voltage may compromise the operation of the relay.











### **Ordering Information**

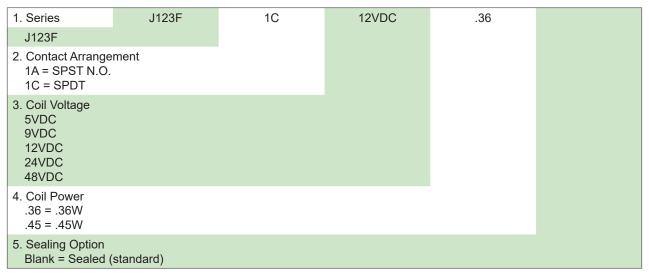

#### Dimensions


Units = mm

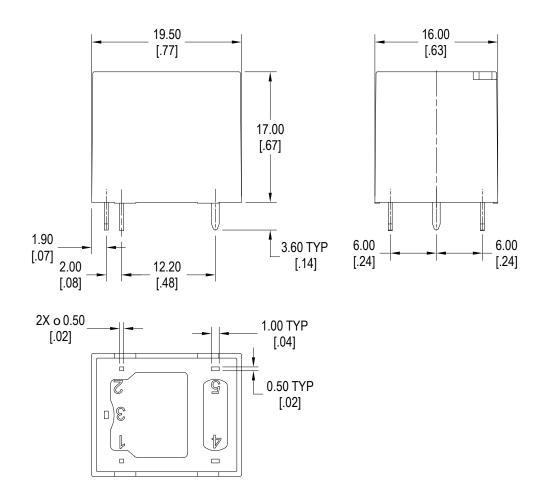




#### Schematics Bottom Views

1A






# PC Layouts

Bottom Views

1A



1C

1C

